



**Generating Set PROFESSIONAL - Diesel** 

# GE.PK.067/061.PRO+011

1500 rpm - Threephase - 50Hz - 400V Multifunction panel without switching on board



Image for demonstration purposes

# **Standard equipment**

## Canopy Soundproofing

Removable soundproof canopy Painting canopy (RAL) in galvanized sheet steel Soundproofing with class 1 polyester material Handles with key lock and automatic closing Inspection doors for controls and maintenance Inspection doors with hermetic gasket

## Exhaust

Exhaust rain cap Insulated exhaust pipes Internal residential muffler

## Fuel Supply

Single wall daily tank with bunded base Automatic shutdown system for low fuel level Fuel gauge

## Handling

n.4 lifting hooks integrated into the bearing structure Loadable side by side for truck transportation

### Base Frame

Anti-vibrating mounting pads Anti pollution Bunded base

# Engine

High coolant temperature and low oil pressure shutdown system Engine liquids (oil and antifreeze) Tropicalized radiator Rotating parts protection

### Alternator

AVR Automatic Voltage Regulator Impregnation for marine environment IP23

## Panel & connection

**Emergency Stop button** Protection by controller Non-Automatic circuit breaker on panel board Tamperproof panel IP55 Cable output from the bottom IP44 wiring Start-up battery (pre-charged) Grounding point

## Documentation

CE conformity declaration User and Maintenance manual Wirings diagrams

### Normatives

All Generating sets are compliant to CE Marking 2014/30/UE Electromagnetic compatibility 2000/14/CE Noise Emission for outdoor use Factory-designed systems built according to ISO 9001:2015 CEI EN 60204-1:2018 - Electrical equipment of machines





# **Primary data**

General Information		
Speed	RPM	1500
Frequency	Hz	50
PRP	KVA	60
PRP - Prime power	KW	48,0
LTP - Standby power	KVA	66
LTP - Standby power	KW	52,8
Standard Voltage	V	400/230
Current	А	86,71
Voltage for current calculation	V	400
COSFI	0,8	0,8
General electrical protection		
Circuit-breaker rated current	Α	100
Гуре		Non-Automatic circuit breaker on panel board
Circuit-breaker poles	Ν	4P
Optional/notes circuit-breaker		Opening coil
Noise level +/- 3dB(A)		
LWA	dB(A)	92
Sound pressure level @ 7 mt	dB(A)	67
Sound pressure level @ 1 mt	dB(A)	76
Fuel Consumption		
ГҮРЕ		Diesel
Standard Fuel Tank capacity	lt	250
Autonomy @ 75% load	h	25
Fuel consumption at 100% load	lt/h	13,9
Fuel consumption at 75% load	lt/h	10,4
Fuel consumption at 50% load	lt/h	7,2
🛱 General data		
Rated capacity	Ah	1x120
Auxiliary Voltage	V	12
Exhaust gas temperature	°C	557
Exhaust gas flow	l/s	168,1
Combustion air flow	l/s	63
Cooling fan airflow	mc/s	1,5
Exhaust diameter	тт	80
Weight and Dimensions		
Dimensions (L x w x h)	ст	251x112x164
Weight with liquids (excluding optionals and fuel)	Kg (+/-3%)	1256





# Engine

Factory		Perkins
Model		1103A-33TG2
Emissions stage		Stage 0
Speed governor		Mechanic
Radiator	°C	50
Cooling	Тіро	liquid (water + 50% Paraflu11)
Active net power	Kwm	53,8
Nominal net power	CV	73,1
Cycle	Тіро	4 strokes
Injection	Тіро	Direct
Aspiration	Тіро	Turbo
Numbers of cylinders	Ν	3
Cylinders arrangement		L
Bore	mm	105
Stroke	mm	127
Total displacement	lt	3,297
Engine oil features		15W40-API CI-4/CH-4 ACEA E5-E7
Total oil capacity	lt	8,3
Total coolant capacity	lt	10,2
ISO 8528-5 class		G2

# Alternator

### \* May vary based on stock availability. However, a primary brand will be used.

Factory		Stamford	
Model		S1L2-Y1	
Single-phase Range	KVA	62,5	
Voltage Regulator (voltage accuracy)	+/- %	1	
Poles	N°	4	
Phases	N°	3+N	
Standard windings connection		Star Series	
Stator/rotor impregnation		H (Outdoor Temp 40°C)	
Efficiency	%	90,1	
Engine coupling		Elastic disk	
Short circuit current		>= 300% (3ln)	
Protection degree	IP	23	
Cooling system		Self ventilating	
Maxium overspeed	rpm	2250	
Waveform distortion	%	<5	
Exciter		Diode bridge	

# Standard operating environmental conditions


Ambient temperature	°C	25
Relative Humidity	%	30
Max altitude	mt	1000





# Control Systems on board QLE-B-SC-3F-4P-160-O2





operating scheme - schema di funzionamento

# QLE Multifunction panel without switching on board

The QLE command and control panel offers outstanding protection, monitoring and control for small and middle size generator sets. Elcos's control module MC2 Plus offers advanced features to meet the most demanding on-site application. Elcos's control module MC2 Plus is designed for offer an easy user interface. Variant without transfer switch. The panel directly manages the QLTS and QC panels. The output line is protected by a magnetothermic breaker with opening coil. The overload and short-circuit protection is managed by the control board.

# Mechanical features

egree IP 55
-------------

# Battery charger

Model		ELCOS - CB1	
Maximum output current	Α	2,5	
Output DC voltage (selectable)	Vdc	12-24	
Input AC voltage (selectable)	Vac	220-260	
Frequency	Hz	50-60	

# Data Communication

Data connection port	RS-485
Communication protocol	Mod-bus RTU-8N1

# Remotable functions in terminal box

GS start Mains contactor close/open command (2) Programmable output - Volt free output Genset contactor close/open command (1) Remote horn - DC output

(1) Ready to load function (ARS mode without QC or QLTS panel)(1) Genset contactor open and close command (AMF mode with QC or QLTS panel)(2) Mains contactor open and close command (AMF mode with QC or QLTS panel)



# Control Module



#### Specifics

Applications Emergency to the Mains Stand-alone Construction site/Rental Self-production

#### **ENGINE MEASURES**

Fuel tank level % Engine oil pressure BAR (1) Engine Coolant temperature °C (1) Total run time Battery voltage Start-ups counter Engine speed

#### ALTERNATOR MEASURES

Generator Voltage L1, L2, L3 Generator Voltage L1-N, L2-N, L3-N Generator frequency Generator current L1, L2, L3 Generator Apparent Power kVA Generator Active Power kW

#### COMMUNICATION PORTS

Can-bus port RS485 port with Mod-bus RTU communication USB port for parameters saving and firmware update

#### EQUIPMENT

Microprocessor Logic Back-lit display Programmable from display 16 event log Icons management STOP button START button TEST button Reset alarm button Alarm mute button

#### PRE-ALARMS/ ALARMS

Common Alarm Fuel reserve (pre-alarm) Low fuel level (alarm) Charge alternator failed (dinamo) Low oil pressure (alarm) Oil sensor failed (alarm) High coolant temperature (alarm) Low water level (1) Water in fuel (1) Battery undervoltage Battery overvoltage GS failure to start GS failure to stop Can-bus Failure No Can-bus communication Genset overload L1, L2, L3 phases Genset short circuit Genset overvoltage Genset undervoltage Genset high frequency Genset low frequency overspeed Earth fault (alarm) Maintenance request Emergency button pressed Remote emergency active Genset negative phase sequence

Model

MC2 Plus

Operating mode

AMF - ARS

#### VISUALIZATIONS ON CONTROL MODULE/DISPLAY

Pre-alarms Alarms Engine measures Alternator measures Operating mode Genset status Genset contactor status Glow plugs status

#### **CONTROL MODULE FUNCTIONS**

Remote Start and Stop Manual Start and stop Emergency stop button on panel board Remote emergency stop Remote test on load Scheduled start-ups MODBUS commands (Start, Stop, Reset, Test)

Elcos MC2 control module is designed for diesel

generating sets. It offers outstanding protection, monitoring and control for small and middle size generator sets.



### AAABBB

# **OPTIONAL**

## Content Supply

COSIL!	O.G-ACO-AT-CI-01	External tank connections for supply only from external tank (g without tank) GE 10/100
	O.G-ACO-BT-P2400-600	600 Lt Oversized Fuel Tank on board for BF/PRO(50/100 kVA), (Increased weight and size)

# Batteries

<b>F</b>	O.G-BAT-BAE-02	Maintenance free high efficiency starter batteries (50/100 kVA)
	O.G-BAT-STB-01	Battery isolator lockable (10/100 kVA)
Canopy		
	O.G-COF-PV-01	Lift off doors kit (10/100 kVA) for SS and PRO version
🛱 Electrical on	board	
	O.Q-QBM-BMIN-230V-02	Additional price for 230V minimum voltage coil on MCCB both on the control panel and on the alternator (check feasibility)
	O.Q-QBM-CPI-BEN-01	Permanent insulation controller for IT networks up to 230V / 400V. BENDER IR423-D4-1. Adjustable threshold 10 ÷ 300 kohm. (2 DIN rail modules - check feasibility)
	O.Q-QLE-K-DIF-M3	Adjustable differential protection only for MC2-PLUS controller for Gen Sets 10/500 kVA (+011 variant)



<u>i</u> han	O.Q-QPE-INT-CST-02	STATUS and TRIP contact GE main switch wired to terminal board inside the QPE panel (50 / 100KVA) on board the generator (no variant +10)
₩₩₩₩₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩ ₩	O.Q-QLE-QPE-MC4	Additional price for QPE-C panel with MC4 replacing the standard QLE-A.
	O.Q-QLE-QBM-DSE-7320	Additional price for QBM DSE7320 panel replacing the standard QLE-A.
	O.Q-QLE-QBM-COM-AMF25	Additional price for QBM COMAP AMF25 panel replacing the standard QLE-A.

# Contemporation Engine

O.G-MOT-K-40C-02	Engine liquids suitable for -40°C ambient temperature for Gen Sets 50/100 kVA
O.G-MOT-PO-01	Oil change pump for Gen Sets 10/100 kVA

🚟 GE.PK.067/061.ST.PRO+011





Engine pre-heater 230V with thermostat on board for Gen Sets 10/100 kVA + 130/500 PRO O.G-MOT-SC-AC-EL-01 version

Cross-shaped earth spike, height 1.5mt, galvanized, complete with clamp and 3m

yellow/green cable model FS17 1x35mm<sup>2</sup> with cable lugs.



O.G-MOT-SC-AC-EL-02 Super hot engine heater 230V with thermostat on board for Gen Sets 10/100 kVA

### CHANNEL HAND

	O.G-MOV-GC-S2000	Lifting hook (50/100 kVA) PRO Version
ATS Panels	QLTS.100A	Wall-mounted ATS switching panel 100A 4P (65 kVA 400V - 35 kVA 230V) Dim. 45 x 16 x 40 cm - 12 kg.
Test		
	MS.CP-LT-01	FAT - Factory Acceptance Test for single Gen Set from 10 to 100 kVA according to our standard procedures in Elcos factory (max 2 hours - max 4 people - max 1 hour of operation)
	MS.CP-SP-01	FAT - Factory Acceptance Test for single custom Gen Set from 10 to 100 kVA max 4 operating hours or parallel system up to 4 units for 1 operating hour, in Elcos factory (max 4 hours - max 4 people )
	MS.CP-ST-01	FAT - Factory Acceptance Test for single Gen Set from 10 to 100 kVA according to our standard procedures in Elcos factory (max 4 hours - max 4 people - max 2 hour of operation)
Vari		
	O.G-VAR-PUN-TER-01	Round earth spike, diam. 20 mm, height 1.5mt, galvanized, complete with clamp and 3m yellow/green cable model FS17 1x35mm <sup>2</sup> with cable lugs.

Ö

Ö

	Data and technical specifications are subject to change in order to update or improve the products.
aximum power available, under the herating set is capable of delivering aintenance intervals. The overload is	Data and technical specifications

### PRP

Engines of this rating provide unlimited hours of usage in a variable load application. The average load factor should not exceed 70% of the engine's prime power rating with a maximum number of 500 operational hours at 100% prime power rating. An overload capability of 10% is available, however, is limited to a period of 1 in every 12 hours


O.G-VAR-PUN-TER-02

#### LTP

Limited-time running power is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500h of operation per year with the maintenance intervals. The overload is not allowed.



🗮 GE.PK.067/061.ST.PRO+011

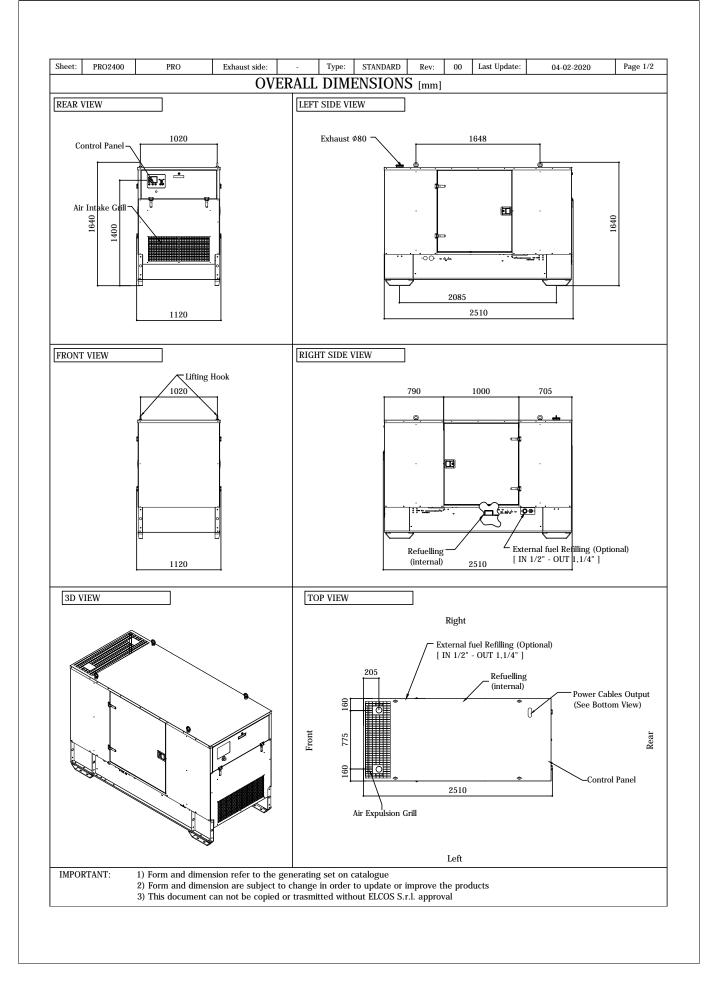



🗮 GE.PK.067/061.ST.PRO+011

