

AVP 655

Volvo Penta
Mecc Alte
D+ &



ISO8528	GC,) &
SZUTEST	GC - \$\$\$%
CE	

2000/14/EC
 &\$\$\$#(#
 z) \$ z' \$z 'D:

	"	kw	"	kw	Amp
400/230	655,00	524,00	595,00	476,00	858,83

fP GDE GC,) &
 fDF DE %s1 % %& GC " \$(** z&(GC

Standard Specifications

z
 fl ! E
 z
 z

1

ALTERNATOR

D: A Z 5J F
 fl " " E
 fl \$\$\$# \$\$\$ E
 fl " \$ E

TRANSFER SWITCH

!

AVP 655

Volvo Penta
Mecc Alte
D+' &'




Manufacturer	Volvo Penta		
Model	TAD1642GE		
		% \$ \$ ' "# "	
		565,00 kw [768,00HP]	
	L	16,120	
	"	144x165	
		16,5:1	
	fl # 7	"# "	1500
	fl 7	L	48,00
		L	60,00
AbsorbedAirDischargeReSourceKey.Text	' # "	41,20	
	' # "	600,00	
		24 V d.c.	
	Load	% \$ \$ i	'+) i
	# ") \$ i	
		119,70	88,40 59,00

		Mecc Alte
		ECO40 1,5L/4
	Hz	50
	"	620,00
7cg		0,80
		3
	fl 7	400/230
	A	894,90

		fl 7		fl 7	
	"	"	"	"	L
AVP 655		3341,00	1550,00	2196,00	850,00
		fl 7		fl 7	
	"	"	"	"	L
MS 80	4970	4810	1606	2615	850

D+' &'

!

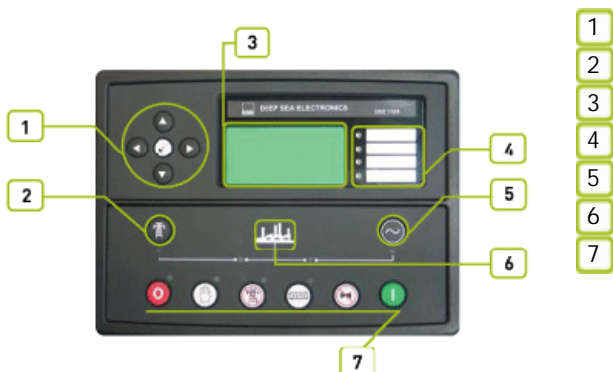

AVP 655

Volvo Penta
Mecc Alte
D+' &'



1

'8G9Ž '+' &\$Ž
) 5Z&&\$#&(\$

2

3

4

'8G9 '+' &\$
&&\$ ŁŽ
"8G9 '+' &\$
'8G9 '+' &\$
Ž
% &I '* (
ŽFG&' &žFG(,) Ž
Ž

AVP 655

Volvo Penta
Mecc Alte
D+ &



f@z@Bl
f@z@Bl

"z" "z"

f@z@Bl

971

#

#

#

#



f&%) +L

f&)(, L

f&)% \$L

6G'9B '*\$-) \$

6G'9B '*%\$\$\$!*!&

6G'9B '*%\$\$\$!*!(

#



ž

%, !&*(

&(\$)

ž

ž

GA 8

!&+""

ž

AVP 655

Volvo Penta
Mecc Alte
D+ &



- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	4810
fl "L	"	2615
	L	850